

Upgraded high pressure compressor

PCP 300BAR 4500PSI

Sensitive reaction
Easy to understand .
High accuracy


MANUAL



Oil level indicator



ACCURATE DATA READING



Burst disc



Oil level indicator

COMPRESSOR I

Model number		Function	
TXES011		Shut off the compressor manually	
Voltage		Size	
100~130V / 220~250V		41*25*37cm/ 16.14*9.84*14.57 inch	
Weight		Oil recommend	
110V= 19.5KG/43lb 220V=17.75KG/39.13lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	35L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
1.8KW	Splash	YES	CE

Upgraded high pressure compressor


PCP 300BAR 4500PSI

AUTOMATIC



It will auto stop when it reaches the pressure you set. Very convenience

Oil level indicator



COMPRESSOR I

SET PRESSURE VERSION

BURST DISC

OIL LEVEL INDICATOR

Model number		Function	
TXES012		Shutoff the compressor automatically	
Voltage		Size	
100~130V / 220~250V		41*25*37cm/ 16.14*9.84*14.57 inch	
Weight		Oil recommend	
110V= 19.5KG/43lb 220V=17.75KG/39.13lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	35L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
18 1.8KW	Splash	YES	CE

Upgraded high pressure compressor

PCP 300BAR 4500PSI

MANUAL

Digital display to show the machine temperature




Sensitive reaction .
Easy to understand .
High accuracy

Built in oil-water separator



ACCURATE DATA READING



oil-water separator

COMPRESSOR II

Model number		Function	
TXED011		Shut off the compressor manually	
Voltage		Size	
100~130V / 220~240V		53*40*48cm/ 20.87*15.75*18.90 inch	
Weight		Oil recommend	
110V= 30.7KG/67.68lb 220V=30.5KG/67.24lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	40L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
2.2KW	Splash	YES	CE

Upgraded high pressure compressor

PCP 300BAR 4500PSI

AUTOMATIC

It will auto stop when it reaches the pressure you set. Very convenience

Digital display to show the machine temperature

Built in oil-water separator



COMPRESSOR II

SET PRESSURE VERSION

oil-water separator

Model number		Function	
TXED012		Shutoff the compressor automatically	
Voltage		Size	
100~130V / 220~240V		53*40*48cm/ 20.87*15.75*18.90 inch	
Weight		Oil recommend	
110V= 30.7KG/67.68lb 220V=30.5KG/67.24lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	40L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
20 2.2KW	Splash	YES	CE

Upgraded high pressure compressor

PCP 300BAR 4500PSI

AUTO PURGE

Digital display to show the machine temperature

It will auto stop when it reaches the pressure you set. Very convenience


Built in oil-water separator



PURGE VALVE



SET PRESSURE VERSION



oil-water separator

COMPRESSOR II

Model number		Function	
TXED013		Auto stop and auto purge version/ Shut off automatically when it reaches the compressor you set and auto purge at the same time	
Voltage		Size	
100~130V / 220~240V		53*40*48cm/ 20.87*15.75*18.90 inch	
Weight		Oil recommend	
110V= 32KG/70.55lb 220V=33KG/72.75lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	40L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
2.2KW	Splash	YES	CE

Upgraded high pressure compressor

PCP 300BAR 4500PSI

AUTOMATIC

It will auto stop when it reaches the pressure you set. Very convenience



Digital display to show the machine temperature

Built-in double filters



COMPRESSOR II

SET PRESSURE VERSION

oil-water separator

Model number		Function	
TXEDT042		Shutoff the compressor automatically	
Voltage		Size	
100~130V / 220~240V		53*40*48cm/ 20.87*15.75*18.90 inch	
Weight		Oil recommend	
110V=27KG/60lb 220V=26KG/57.3lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	40L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
2.2KW	Splash	YES	CE

Upgraded high pressure compressor

PCP 300BAR **4500**PSI


MANUAL

Digital display to show the machine temperature

Built-in oil- water separator



Sensitive reaction.
Easy to understand
High accuracy



COMPRESSOR II

ACCURATE DATA READING

oil-water separator

Model number		Function	
TXEDM041		Shut off the compressor manually	
Voltage		Size	
100~130V / 220~240V		52*41*41cm/ 20.47*16.14*16.14 inch	
Weight		Oil recommend	
110V=27KG/60lb 220V=26KG/57.3lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	40L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
2.2KW	Splash	YES	CE 23

Upgraded high pressure compressor



PURE AIR UP TO 300Bar 4500PSI


BUILT IN WATER COOLING DOUBLE FILTERS



Digital display to show the machine temperature

It will auto stop when it reaches the pressure you set

Intake air filtration system



COMPRESSOR II

DOUBLE FILTERS
ADVANCED SAFETY VALVE

SET PRESSURE VERSION

DRY PACK AIR INLET FILTER

Model number		Function	
TXEDT032		Shut off the compressor automatically	
Voltage		Size	
100~130V / 220~240V		58*52*48cm/ 22.83*20.47*18.90 inch	
Weight		Oil recommend	
110V= 46KG/101.41lb 220V=45KG/99.20lb		100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	50L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
24 2.2KW	Splash	YES	CE


Upgraded high pressure compressor

PURE AIR UP TO 300Bar 4500PSI

MANUAL



ACCURATE DATA READING



DOUBLE FILTERS SAFETY VALVE

COMPRESSOR II

Model number		Function	
TXEDB051		Shutoff the compressor manually	
Voltage		Size	
100~130V / 220~240V		53*40*48cm/ 20.87*15.75*18.90 inch	
Weight		Oil recommend	
110V=50KG/110.23lb 220V=48KG/105.82lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	40L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
2.2KW	Splash	YES	CE

Upgraded high pressure compressor

PURE AIR UP TO 300Bar 4500PSI

AUTOMATIC



it will auto stop when it reaches the pressure you set

Temperature display



COMPRESSOR II

SET PRESSURE VERSION


DOUBLE FILTERS
SAFETY VALVE

Model number		Function	
TXEDB052		Shutoff the compressor automatically	
Voltage		Size	
100~130V / 220~240V		53*40*48cm/ 20.87*15.75*18.90 inch	
Weight		Oil recommend	
110V=50KG/110.23lb 220V=48KG/105.82lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	40L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
2.2KW	Splash	YES	CE

Upgraded high pressure compressor

300BAR 4500 PSI

MANUAL

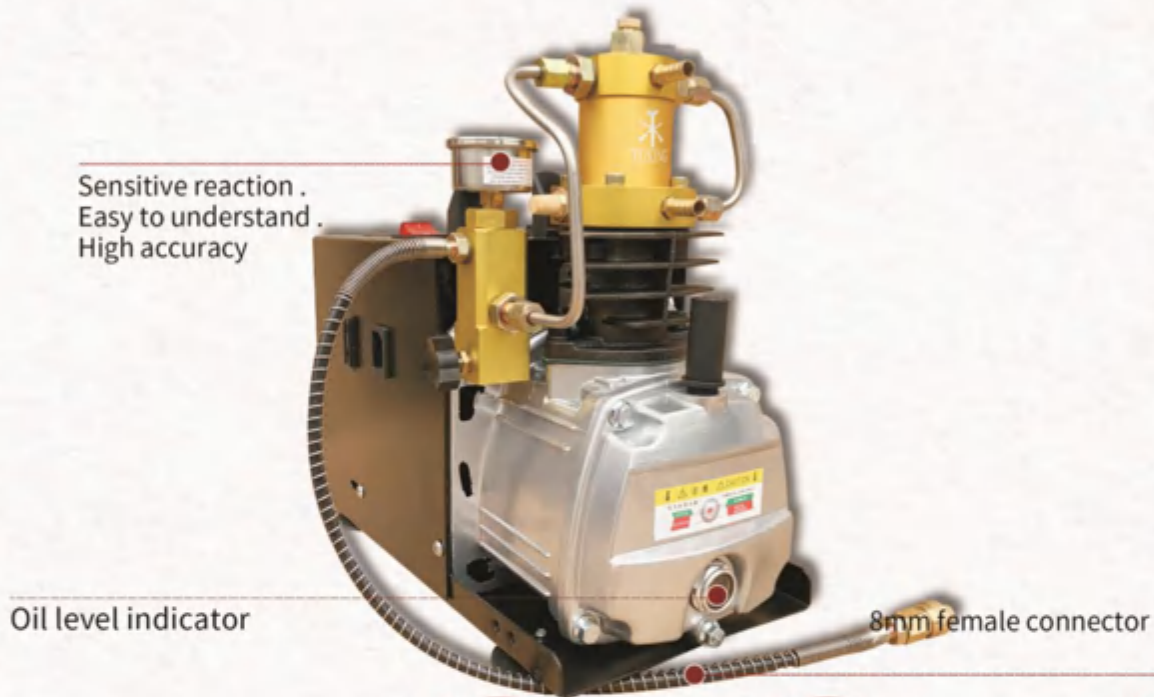

COMPRESSOR III

OIL LEVEL INDICATOR

ACCURATE DATA READING

FILLING HOSE

Model number		Function	
TXES021		Shut off the compressor manually	
Voltage		Size	
100~130V / 220~250V		41*24*45cm/ 16.14*9.45*17.72 inch	
Weight		Oil recommend	
110V= 18.75KG/41.34lb 220V=16.7KG/36.82lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	35L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
2.2KW	Splash	YES	CE

Upgraded high pressure compressor

300BAR 4500 PSI

AUTOMATIC

It will auto stop when it reaches the pressure you set. Very convenience

Digital display to show the machine temperature



Oil level indicator

8mm female connector



COMPRESSOR III

OIL LEVEL INDICATOR

SET PRESSURE VERSION

FILLING HOSE

Model number		Function	
TXES022		Shutoff the compressor automatically	
Voltage		Size	
100~130V / 220~250V		41*24*45cm/ 16.14*9.45*17.72 inch	
Weight		Oil recommend	
110V= 19.15KG/42.22lb 220V=16.6KG/36.60lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	35L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
2.2KW	Splash	YES	CE

Upgraded high pressure compressor

300BAR 4500 PSI

AUTO PURGE

It will auto stop when it reaches the pressure you set. Very convenience

Oil level indicator

8mm female connector



COMPRESSOR III

OIL LEVEL INDICATOR

SET PRESSURE VERSION

FILLING HOSE

Model number		Function	
TXES023		Auto stop and auto purge version/ Shut off automatically when it reaches the compressor you set and auto purge at the same time	
Voltage		Size	
100~130V / 220~250V		41*24*45cm/ 16.14*9.45*17.72 inch	
Weight		Oil recommend	
110V= 19.95KG/43.98lb 220V=18.15KG/40.01lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	35L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
2.2KW	Splash	YES	CE

Upgraded high pressure compressor

300BAR 4500 PSI

MANUAL

Sensitive reaction .
Easy to understand .
High accuracy



Oil level indicator

8mm female connector



COMPRESSOR IV

OIL LEVEL INDICATOR

ACCURATE DATA READING

FILLING HOSE

Model number		Function	
TXES031		Shutoff the compressor manually	
Voltage		Size	
100~130V / 220~250V		41*24*45cm/ 16.14*9.45*17.72 inch	
Weight		Oil recommend	
110V= 18.75KG/41.34lb 220V=17.15KG/37.81lb		ISO 100 100% synthetic compressor oil	
Working pressure	Cooling system	Air flow rate	Inflating speed
4500PSI/30Mpa/300Bar	Water and fan cooling	35L/min	2800R/min
Motor power rating	Lubrication mode	OEM	Certification
2.2KW	Splash	YES	CE

NEW

HOT SALE **HOT OFFER** **HOT PRICE**

12V CAR-BATTERY

HIGH PRESSURE 12V COMPRESSOR

Accurate
Sensitive
Easy understand



ACCURATE DATA READING



COMPRESSOR VI

Model number	Compression stage	Voltage	Power rate
TXET061-1	Two stage Reciprocating	12V/110V/220V	300W copper motor
MAX pressure	Cooling	OEM	Certification
300Bar/4500PSI	Fan cooling	YES	CE

It will auto stop when it reaches the pressure you set very convenience



ADJUSTABLE PRESSURE FUNCTION

It will auto stop when it comes to motor overload Safety

COMPRESSOR VI

Model number	Compression stage	Voltage	Power rate
TXET061-2	Two stage Reciprocating	12V/110V/220V	300W copper motor
MAX pressure	Cooling	OEM	Certification
300Bar/4500PSI	Fan cooling	YES	CE

NEW

HOT SALE **HOT OFFER** **HOT PRICE**

12V CAR-BATTERY

HIGH PRESSURE 12V COMPRESSOR

Accurate
Sensitive
Easy understand



ACCURATE DATA READING



Converter inlet

COMPRESSOR VI

Model number	Compression stage	Voltage	Power rate
TXET062-1	Two stage Reciprocating	12V/110V/220V	300W copper motor
MAX pressure	Cooling	OEM	Certification
300Bar/4500PSI	Fan cooling	YES	CE

It will auto stop when it reaches the pressure you set very convenience



ADJUSTABLE PRESSURE FUNCTION

It will auto stop when it comes to motor overload Safety

Converter inlet

COMPRESSOR VI

Model number	Compression stage	Voltage	Power rate
TXET062-2	Two stage Reciprocating	12V/110V/220V	300W copper motor
MAX pressure	Cooling	OEM	Certification
300Bar/4500PSI	Fan cooling	YES	CE